



KILLER INNOVATIONS

VELOCITY DEFENSE TRIGGER SHOE FOR GLOCK INSTALLATION


BEFORE YOU START THE INSTALLATION, PLEASE READ THE FOLLOWING:

1. THIS TRIGGER SHOE IS DESIGNED TO BE USED ONLY WITH SPECIFIC GLOCK PISTOLS. PLEASE BE SURE YOU HAVE SELECTED THE CORRECT TRIGGER FOR YOUR PISTOL. WE RECOMMEND INSTALLATION BE PERFORMED BY A COMPETENT GUNSMITH.
2. YOUR TRIGGER SHOE PACKAGE SHOULD INCLUDE:
 - A. TRIGGER SHOE W/ SAFETY (NO TRIGGER BAR)
 - B. THREADED PIN FOR ASSEMBLY ON EXISTING TRIGGER BAR



TOOLS REQUIRED

1/16 INCH PUNCH
HAMMER
.050 ALLEN KEY
BLUE THREAD LOCKER

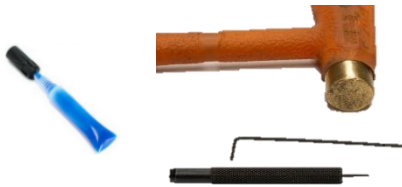

INSTALLATION

INSTALLATION REQUIRES REMOVAL OF FACTORY TRIGGER SHOE FROM TRIGGER BAR.

ONCE REMOVED THE FACTORY TRIGGER SHOE WILL NO LONGER BE USABLE.

1. INSTALLATION AND TEST FIRING SHOULD BE PERFORMED BY A COMPETENT GUNSMITH.
2. ALWAYS CLEAR YOUR FIREARM OF ANY AMMUNITION AND MAKE SAFE BEFORE INSTALLING OR UNINSTALLING THE TRIGGER. ALWAYS FOLLOW PROPER FIREARM SAFETY WHEN USING OR WORKING ON YOUR PISTOL!

3. REMOVE THE CURRENT TRIGGER ASSEMBLY FROM THE WEAPON. THIS CONSISTS OF THE TRIGGER BAR AND SHOE.



4. LOCATE THE PIN ON THE LEFT SIDE OF THE TRIGGER SHOE. IT SHOULD ONLY BE VISIBLE FROM ONE SIDE. PLACE YOUR TRIGGER BAR AND SHOE ON A STABLE SURFACE OR IN A VISE. USE THE 1/16 PUNCH AND HAMMER TO STRIKE THE PIN ON THE LEFT SIDE. THIS WILL CREATE A DIMPLE ON THE RIGHT SIDE OF THE TRIGGER SHOE.



5. LOCATE THE NEWLY CREATED DIMPLE ON THE RIGHT SIDE. TAKE YOUR PUNCH TOOL AND STRIKE THE DIMPLE ON THE RIGHT SIDE TO EJECT THE PIN.



6. YOUR FACTORY TRIGGER SHOE SHOULD NOW SEPARATE FROM THE TRIGGER BAR.



7. USE A .050 ALLEN KEY TO REMOVE THE THREADED PIN ON THE VELOCITY DEFENSE TRIGGER SHOE. PLACE A SMALL AMOUNT OF BLUE THREAD LOCKER ONTO THE THREADED PIN. SLIDE THE SHOE ONTO THE TRIGGER BAR AND THREAD THE PIN INTO THE HOLE. TIGHTEN THE THREADED PIN DOWN HAND TIGHT.



7. YOUR VELOCITY DEFENSE TRIGGER WITH BAR ASSEMBLY IS NOW READY TO BE REINSTALLED IN YOUR FIREARM.

